




ELECTRIC BED- 5 FUNCTIONS

Registration code: SKD-C



Product data sheet

FEATURES AND HIGHLIGHTS

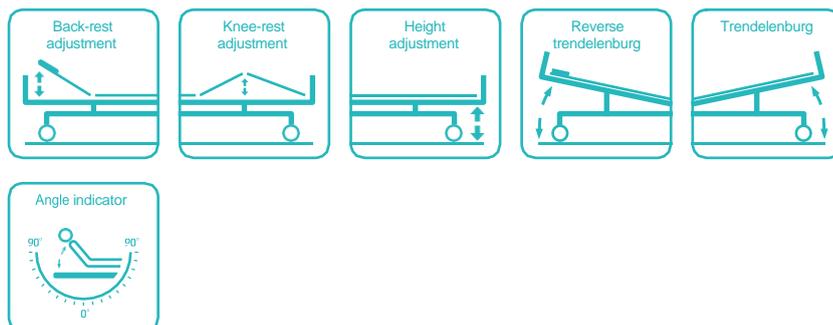

Technical parameters

■ External size (LxW):	2280x1090 mm
■ Mattress platform:	1925x900±10 mm
■ Safe working load:	250 kg
■ Height adjustment:	435-725mm±10 mm
■ Back-rest adjustment:	0-75° (±10°)
■ Knee-rest adjustment:	0-35° (±10°)
■ Reverse Trendelenburg:	0-12°(±2°)
■ Trendelenburg:	0-12°(±2°)
■ Angle indicator:	0-90°
■ Voltage and frequency:	100-240 V · 50/60 Hz
■ Plug as required (hospital grade)	



Technical configuration

<input checked="" type="checkbox"/> Angle indicator for back-rest and Trendelenburg position	4 pcs.
<input checked="" type="checkbox"/> Linear motor	4 pcs.
<input checked="" type="checkbox"/> 5" double side castors with central locking system	4 pcs.
<input checked="" type="checkbox"/> PP side rail	1 set
<input checked="" type="checkbox"/> PP bed ends	1 set
<input checked="" type="checkbox"/> Hand Controller	1pc
<input checked="" type="checkbox"/> IV pole	1 set
<input checked="" type="checkbox"/> IV pole prevision	4 pcs.
<input checked="" type="checkbox"/> Drainage hook	2 pcs.
<input checked="" type="checkbox"/> Central locking pedal	2 pcs.



Head and Foot Board

Extra Long and height head foot board, with curve surrounded design, provide comforting feeling for patients



Bed Surface

Stamping forming platform, smooth surface no welding scar, bearing 250 kg load. Option ABS platform and resin X-ray translucent platform.



Welding | Chassis

Panasonic Robotic ensure 360° full smooth welding.



Electric Motor

LINAKmotor, with UL/ROHS/EN standard. Noise under 50dB, with lifetime 20,000times movement.



Steels | Painting

11 Process epoxy painting, ASTM testing anti-bacterial, paint thickness 0.12mm, brightness 60°, paint can resist 50kg impact



Plastic

Environmental plastic can be sterilized in 100°C, tensile upto 30MPa



Side Rail

Tuck away side rail with angle indicator.



Castors

TPR tire no worn out after running 30 km, save anti-winding hard shell, united forming without bolts. Pass dynamic test: Bearing 120 kg, run 30 km and pass obstacles 500 time.



Durable Brakes

Break spring keep qualified after 10,000 times uninteruped break.



Angle Indicator

Patent angle indicator.



Drainage Hooks

Plastic drainage hook, movable



IV pole

The IV pole is made of stainless steel and has four plastic hooks that can bear up to 15 kg of weight.

