



B8e5y

MULTIFUNCTIONAL ELECTRIC BED


Registration code: SKD-C

*Incluye colchón




B8e5y

FEATURES AND HIGHLIGHTS

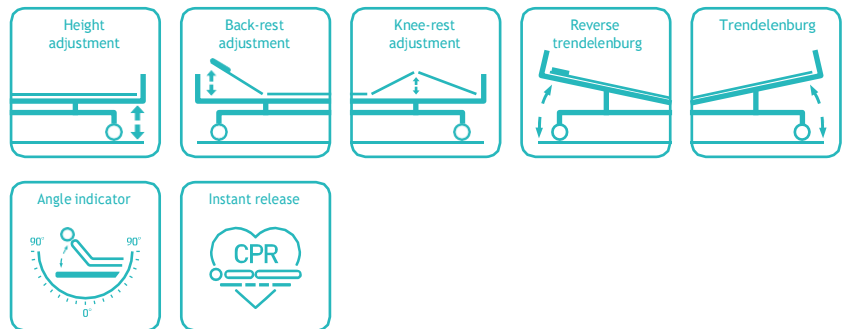

Technical parameters

External size (LxW):	2090x910 mm
Safe working load:	250 kg
Height adjustment:	460-700 mm
Back-rest adjustment:	0-75° (±10°)
Knee-rest adjustment:	0-35° (±10°)
Reverse Trendelenburg:	0-12°
Trendelenburg:	0-12°
Angle indicator:	0-90°
Voltage and frequency:	100-240 V · 50/60 Hz
Plug as required (hospital grade)	

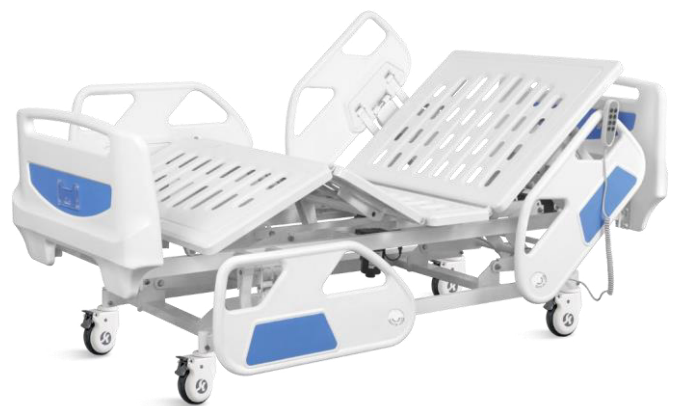

Technical configuration

<input checked="" type="checkbox"/> Linear Motor	4 pcs
<input checked="" type="checkbox"/> 5" Covered Castors	4 pcs
<input checked="" type="checkbox"/> ABS Side Rail Extra Height	1 set
<input checked="" type="checkbox"/> ABS Bed Ends with Integrated Control Panel	1 set
<input checked="" type="checkbox"/> IV Pole	1 set
<input checked="" type="checkbox"/> IV Pole Prevision	4 pcs
<input checked="" type="checkbox"/> Drainage Hook	2 pcs
<input checked="" type="checkbox"/> Central Locking Pedal	2 pcs
<input checked="" type="checkbox"/> Electric CPR	



Optional

<input type="checkbox"/> Manual CPR	
<input type="checkbox"/> Weighing System	
<input type="checkbox"/> Back-up Battery	
<input type="checkbox"/> X-ray Bed Surface	
<input type="checkbox"/> Monkey Pole	
<input type="checkbox"/> Balkan Traction Frame	
<input type="checkbox"/> Directional Wheel	

Design

E-shaped large guardrail, with angled display and built-in controller, meets safety standards, providing comforting feeling for patients.



Steels | Painting

Baosteel from Fortune Global 500.
11 Process epoxy painting, ASTM testing anti-bacterial, paint thickness 0.12 mm, brightness 60°, paint can resist 50 kg impact.



Welding | Chassis

Panasonic robotic ensure, 360° full smooth welding.
Solid bed base made of 5.0 mm stamped rotating plate.



Electric Motor

Linear motor, with UL/ROHS/EN standard. Noise under 50 dB, with lifetime 20,000 times movement.



Virgin ABS

Environmental plastic can be sterilized in 100°C, tensile upto 30MPa.



Angle Indicator

Patented angle indicator.



Castors

5" covered casters.
TPR tire no worn out after running 30KM, save anti-winding hard shell, united forming without bolts.
Pass Dynamic test: Bearing 120kg run 30KM and pass obstacles 500 time.



Bed Surface

Stamping forming platform, smooth surface no welding scar, bearing 250 kg load. Optio ABS platform and resin X-ray translucent platform.



Head & Foot Board

Full ABS material, Bottom can endure 100,000times press
Head and foot board can be reversible.



Side Rail

Full ABS material, tuck away side rail with built-in controller.
From top of the guardrail to bed surface is about 345mm, more height provides better protection for patient.
Bottom can endure 100,000times press, buffer, built-in angle indicator.



IV pole

Stainless Steel Column with plastic hook.



Drainage Hooks

Mobile plastic drainage hooks.

